



ZODIAC HURRICANE TECHNOLOGIES, INC.

Professional Division

H1010 MID IO COMMANDO



Considered the finest craft of their type in the world, the Zodiac Hurricane range of RIBS are mission specific and are used by the most knowledgeable and discriminating operators who demand the utmost in ruggedness and reliability. All Hurricane models have removable collars for ease of maintenance as well as the capability of interchanging with DuraRIB foam collars.



Zodiac Hurricane first supplied 10 meter assault RIBS with diesel/waterjet propulsion in the early 1990's. Since that time, various propulsion system and seating options have been refined to meet the requirements of various military organizations worldwide. Seating is fitted with Quikfit attachment system to allow the deck to be quickly reconfigured for various mission options. When equipped with inflatable collar, the Hurricane 1010 is capable of transport by road or aircraft.

The Zodiac Hurricane 1010 MID IO Commando is typically used by a three man crew to transport an eight person commando team complete with inflatable raiding craft in ship to shore, ship to ship and shore to ship assault missions. The deep-V fiberglass hull and inflatable collar combined with wraparound bolsters; provides the seaworthiness, shock mitigation, stability, maneuverability and low signature required to operate reliably and effectively in a hostile maritime environment. The ruggedized hull and collar construction allows the Hurricane 1010 to operate safely in heavy weather and alongside larger craft during ship boarding operations.



H1010 MID IO COMMANDO

GENERAL SPECIFICATIONS

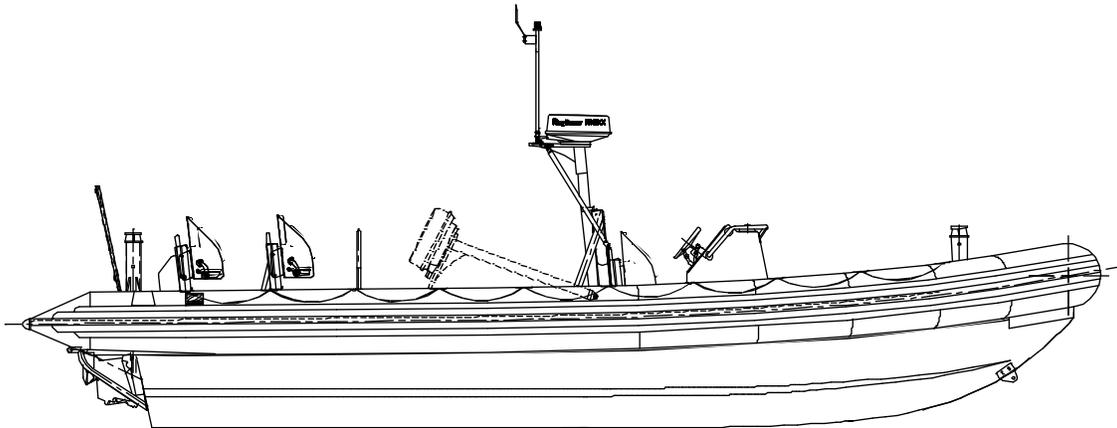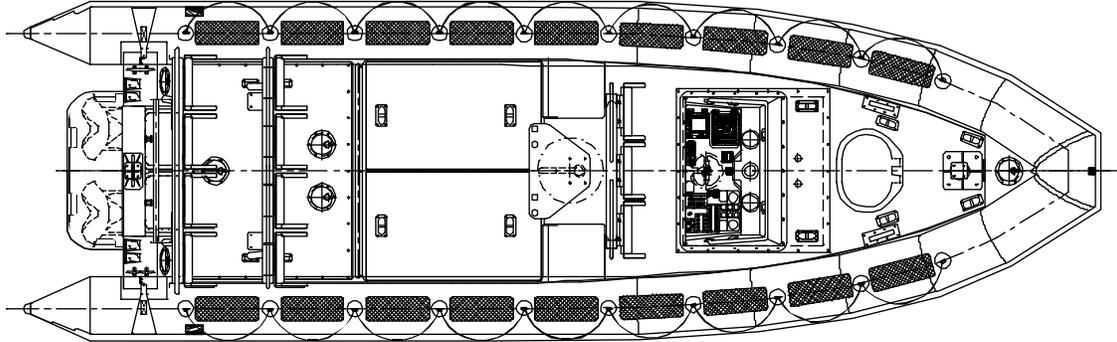

PHYSICAL CHARACTERISTICS:

- Length overall – 10 meters (33 ft.)
 - Beam overall – 3.52 meters (11.6 ft.)
 - Beam (collar deflated) – 2.7 meters (8.9 ft.)
 - Collar diameter - 0.61 meters (24 in.)
 - Collar volume – 5752 liters (203 cu. Ft.)
 - Fuel capacity – 567 liters (150 US gal.)
 - Displacement (with full fuel) – 5600 kg. (12300 lbs.)
 - Max Speed – 43 Knots with 1500 kg. payload, range 140 NM; Max HP 2 x 400 HP
-



H1010 MID IO COMMANDO

BOAT DESCRIPTION

Hull and deck

- Fiberglass hull and deck – Fire retardant Vinylester resin and foam core
- *OPTIONS*: Colour available orange, grey, black or white; SKYDEX deck covering

Collar

- 7 chamber, 1670 dtx Neoprene/Hypalon inflatable tube with inflation/deflation valves and pressure relief valves w/ caps
- Collar accessories – five Rubbing strakes, full length lifelines and non-slip step treads
- *OPTIONS*: Colour available orange, grey, black or white; Auto inflate system, Durarib upgrade

Console

- Three person fiberglass console with front access hatch and welded aluminum wraparound handrail.

Seating

- Maximum 3 crew and 8 passengers.
- *OPTIONS*: Leaning bolster, leaning bolster with drop seat or suspension jockey seating.

Equipment

- Stainless steel bow eye and two heavy-duty stainless steel transom tie-downs
- Mooring – two transom cleats, tow post (mounted at transom) and bow post.
- Under deck access hatches to foredeck and transom hull cavities.
- Flush tiedowns – 12; 2 – 5 pound CO2 fire extinguisher's and stowage
- Aluminum guard/swim platform over drives.
- Folding composite antenna mast; Flag pole on transom.

Bilge pumping/draining

- High capacity deck drains fitted w/ scupper trunks and inlet screens; Manual and Electric bilge pumps.

Hoisting

- Integral SS hoisting fittings with 4 leg sling with polyester webbing legs, galvanized proof loaded shackles and steel master link.

Electrical

- 24 VDC electrical system (20 circuit) with converter for 12 volt subsystem (5 circuit)
- 2 X 24 VDC battery banks (Optima D34M batteries) with selector/isolator switches.
- 220 (16 amp) or 110 (30 amp) VAC shore-power system with battery charger and engine coolant heaters.
- Deck lights – red & white for inside engine space, inside console and deck areas.
- Dimmer switch (2) - instrument lights and separate dimmer for compass light.
- Ground plate system w/ 2 Dynaplates

Navigation/communications

- Navigation lights in accordance with COLREGS '72 for vessels < 20 meters length; Electric horn; Magnetic compass; Optional communications and navigation equipment on request.

Fuel system

- Welded aluminum fuel tank - 150 US gal (567 liters) with fuel gauge, fuel/water separators and fuel stripping system.

Engine/drive options

- Twin Yanmar 6LY-2A (440HP @ 3300 RPM) with Konrad 520 outdrives, SS propellers.
- Twin Yanmar 6LY-2A (440HP @ 3300 RPM) with Kamewa FF310 waterjets
- Twin Cummins QSB380-M (380 HP @ 3000 RPM) with Twin Disc TDJ110 waterjets
- Twin Cummins QSB380-M (380 HP @ 3000 RPM) with Hamilton 274 waterjets

Additional Options Available

- Through Life Support based on operating hours, mission profile, location and operator profile; includes recommended maintenance schedule and spare parts and depot level maintenance
 - Fastener upgrade to metric sizes from imperial
 - Post Delivery Orientation: commissioning, introductory vessel instruction, systems operation and recommended maintenance (maximum 6 attendees per session; one week minimum duration) held on location
-



H1010 MID IO COMMANDO



The overall appearance of the H1010 including all available Zodiac options is a protected trademark of Zodiac.



Disclaimer: Photos may vary with options
Descriptions/Specifications are subject to change
August 2005

For more information please contact your Zodiac dealer or visit our website.