

**D-SHAPE
SRA-750 10**
SEA RIB® ALUMINIUM

**IN-BOARD
"D-SHAPE" COLLAR**

STRENGTH & MODULAR

Zodiac Milpro's SEA RIB® Aluminium are built for demanding professional and military users and designed to be strong and reliable.

SRA-750 feature "D-shape" collar technology, increasing the useable deck area, or it can be fitted with a standard round collar. The collar is readily removable to provide easy maintenance.

The SRA-750 aluminium deck integrates deck tracks, allowing rapid re-configuration to suit the mission.


It is fully versatile and capable multi-role boat that is ease in all sea conditions.

CAPACITY

. maximum number of persons		
(ISO6185, Design category B) :	8	8
(ISO6185, Design category C) :	16	16
. maximum payload		
(ISO6185, Design category B) :	1428 kg	3148 lb
(ISO6185, Design category C) :	2028 kg	4471 lb
. floorboard net area :	10,84 m ²	116,68 ft ²
. flat-floorboard area :	9,21 m ²	99,14 ft ²
. buoyancy volume :	3,77 m ³	133 ft ³

DIMENSIONS

. overall length :	6,77 m	22' 03"
(without engine or crash bar)		
. inside length :	6,45 m	21' 2"
. overall width :	2,76 m	9' 01"
. inside width :	2,20 m	7' 3"
. overall height (without engine) :	1,65 m	5' 5"
. weight empty (hull, fuel tank, collar) :	1040 kg	2293 lb
. buoyancy tube diameter :	0,560 m	22"
. hull storage dimensions :	6,51 x 2,2 x 1,65 m ³	
	21' 4" x 7' 3" x 5' 5"	

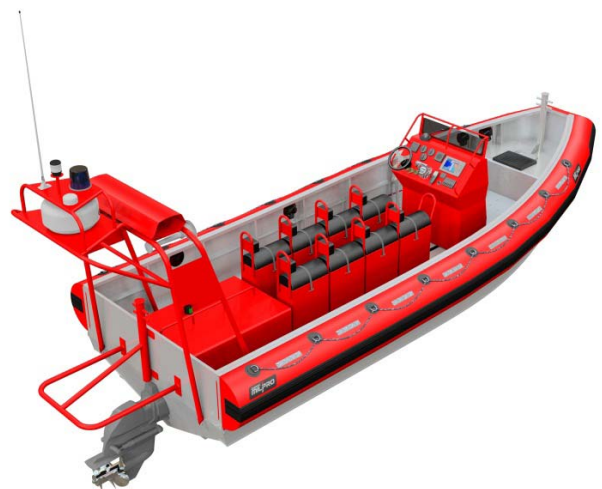

ENGINE POWER

. recommended power :	250 hp	186 kW
. maximum power :	300 hp	224 kW
. maximum engine weight :	541 kg	1193 lb

SAFETY / INFLATION

. airtight compartments on main tube :		5
. inflation pressure :	240 mbar	3,4 PSI

BUOYANCY TUBE CONSTRUCTION (SLIDE ON)

. fabric :	1670 dtx, polyester, CSM / neoprene
. removable buoyancy tube, bolt rope assembly :	yes
. intercommunication / inflation valves on main tube :	4
. all around rubbing strake, flat profile, black :	2
. additional bow rubbing strake horizontal, black :	2

HULL CONSTRUCTION

. marine grade aluminium alloy :	yes
. keel reinforcement :	yes
. airtight compartments :	2

HULL STORAGE

. underdeck fuel tank cavity :	1
(with removable deck plate and access hatch)	
. bow box and anchor locker :	1
. transom motor well, with storage locker :	1

DECK LAYOUT

. deck tracks for modular deck configuration	yes
. bow post	1
. tow post	1

HULL DRAINING

. self-bailers, large flow, with rubber flaps :	2
. electric bilge pump, ignition protected:	1
. hull drain :	1

OPTIONAL EQUIPMENT

. Diver Door	
. rigid lifting frame	
. lifting sling	
. V towing bridle bow	
. V towing bridle aft	
. stand-up console (dual aluminium console)	
. shock mitigation seat	
. jockey seat (1 ; 2 or 3 pers.)	
. bolster (1 or 2 pers.)	
. jockey seat handle	
. foot straps	
. roll-bar	
. self righting system	
. rope guard	

BUOYANCY TUBE - HANDLING

. exterior lifeline, laced on 53 mm stainless steel D rings :	1+1
---	-----

HULL - TOWING AND LIFTING

. transom towing eyes :	2
. bow lifting eye :	1
. transom lifting eyes :	2
. bow mooring eye :	1

HULL - FUEL SYSTEM

. built-in fuel tank :	250 L	66 US gal
. fuel sensor & gauge :		1
. fuel fill and vent, on bow box :		1
. fuel shut off valve, 2 ways :		2

HULL - FUEL SYSTEM OPTIONS

. extra built-in fuel tank :	250 L	66 US gal
. fuel sensor & gauge :		1
. fuel fill and vent, on bow box :		1
. fuel shut off valve, 2 ways :		2

ACCESSORIES

. foot pump :	1
. repair kit :	1
. telescopic paddles :	2

. watertight bow pouch
. ladder
. dive cylinder support (4 or 6)