



Navy grey tube :P/N Z80360Black tube :P/N Z80362Orange tube :P/N Z80361

## EVOLVED FROM A LONG LINE OF RIB

Zodiac Milpro's SEA RIB<sup>™</sup> Responders are built for military use. They are simple, functional, tough, and have been designed to improve maintenance and user's comfort.

Their collar is made with Zodiac Milpro's special intercommunicating valves. It is removable to make maintenance and eventual change easier and faster.

The SRR decks are self draining, and feature a molded bow box and aft motor well to provide convenient storage volumes. These boats come with a large capacity built in fuel tank with a deck access hatch to the fuel connections and gauge.


## CAPACITY

. maximum number of persons (ISO6185) :	6	6
. maximum payload (ISO6185) :	750 kg	1653 lb
. floorboard net area :	2,02 m²	21,7 ft <sup>2</sup>
. buoyancy tube volume :	1,373 m <sup>3</sup>	48 ft <sup>3</sup>

DIMENSIONS		
. overall length :	4,20 m	13' 9"
. inside length :	2,98 m	9' 9"
. overall width :	1,85 m	6'
. inside width :	0,95 m	3' 1"
. weight empty :	220 kg	485 lb
. buoyancy tube diameter :	0,45 m	18"
. hull storage dimensions :	3,55 x 1,25 x 0,60 m <sup>3</sup>	
	11' 7" x 5' 1" x 3' 4"	





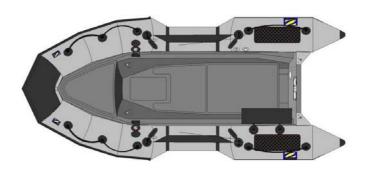

ENGINE POWER		
. shaft length :	Long	20"
. recommended power :	25 hp	19 kW
. maximum power :	40 hp	30 kW
. maximum engine weight :	98 kg	215 lb
COCCTU / INCLATION		

SAFETY / INFLATION		
. airtight compartments on main tube :		3
. tube inflation pressure :	240 mbar	3,4 PSI
. design category (EC 94/25) :		С



BUOYANCY TUBE CONSTRUCTION (SLIDE ON	U	HANDLING	
. fabric : navy grey, 1880 dtx, polyamide, CSM / ne	oprene	. bow carrying handle (plated brass, black) :	1
. intercommunication / inflation valves on main tube (delrin) :	2	. exterior lifeline laced on D rings :	1-
. all around rubbing strake, flat profile, black :	2	. interior lifeline laced on D rings :	1-
HULL CONSTRUCTION (NRVY GREY)		TOWING AND LIFITING	
. deck, glass reinforced plastic, with grey gel-coat :	yes	. bow towing rings on hull, stainless steel U-bolt :	2
. hull, glass reinforced plastic, with grey gel-coat :	yes	. transom towing rings, stainless steel U-bolt :	2
. hull drain :	1	. bow lifting rings on hull, stainless steel folding padeye :	2
. buoyancy foam, closed cells : 0,093 m	<sup>3</sup> 3 ft <sup>3</sup>	. transom lifting rings, stainless steel U-bolt :	2
		. bow mooring eye, stainless steel U-bolt :	1
TRANSOM BLACK			
. self bailer, large flow :	1	ACCESSORIES	
. transom sacrificial plate (plywood):	1	. foot pump :	1
. aluminium engine mounting plate, with security ring :	1	. repair kit :	1
. cross legs reinforcements :	2	. paddles (aluminium shaft, plastic blade) with support :	2

## OPTIONAL EQUIPMENT

- . Rapid Access Door (RAD)
- . lifting sling
- . V towing bridle bow
- . V towing bridle aft
- . stand-up console (GRP 1 pers.)
- . jockey console (GRP 1 pers.)
- . jockey seat without fuel tank (1 or 2 pers.)
- . jockey seat with fuel tank (1 or 2 pers.)
- . bolster (1 pers.)
- . jockey seat handle
- . steering box for jockey seat
- . foot straps
- . roll-bar

- . flexible fuel tank (6 USG 22,7 L)
- . rotomolded fuel tank 90 L (23,7 USG)

+1 +1

1 1 2

- . watertight bow pouch
- . ladder
- . dive cylinder support (4 or 6)

